
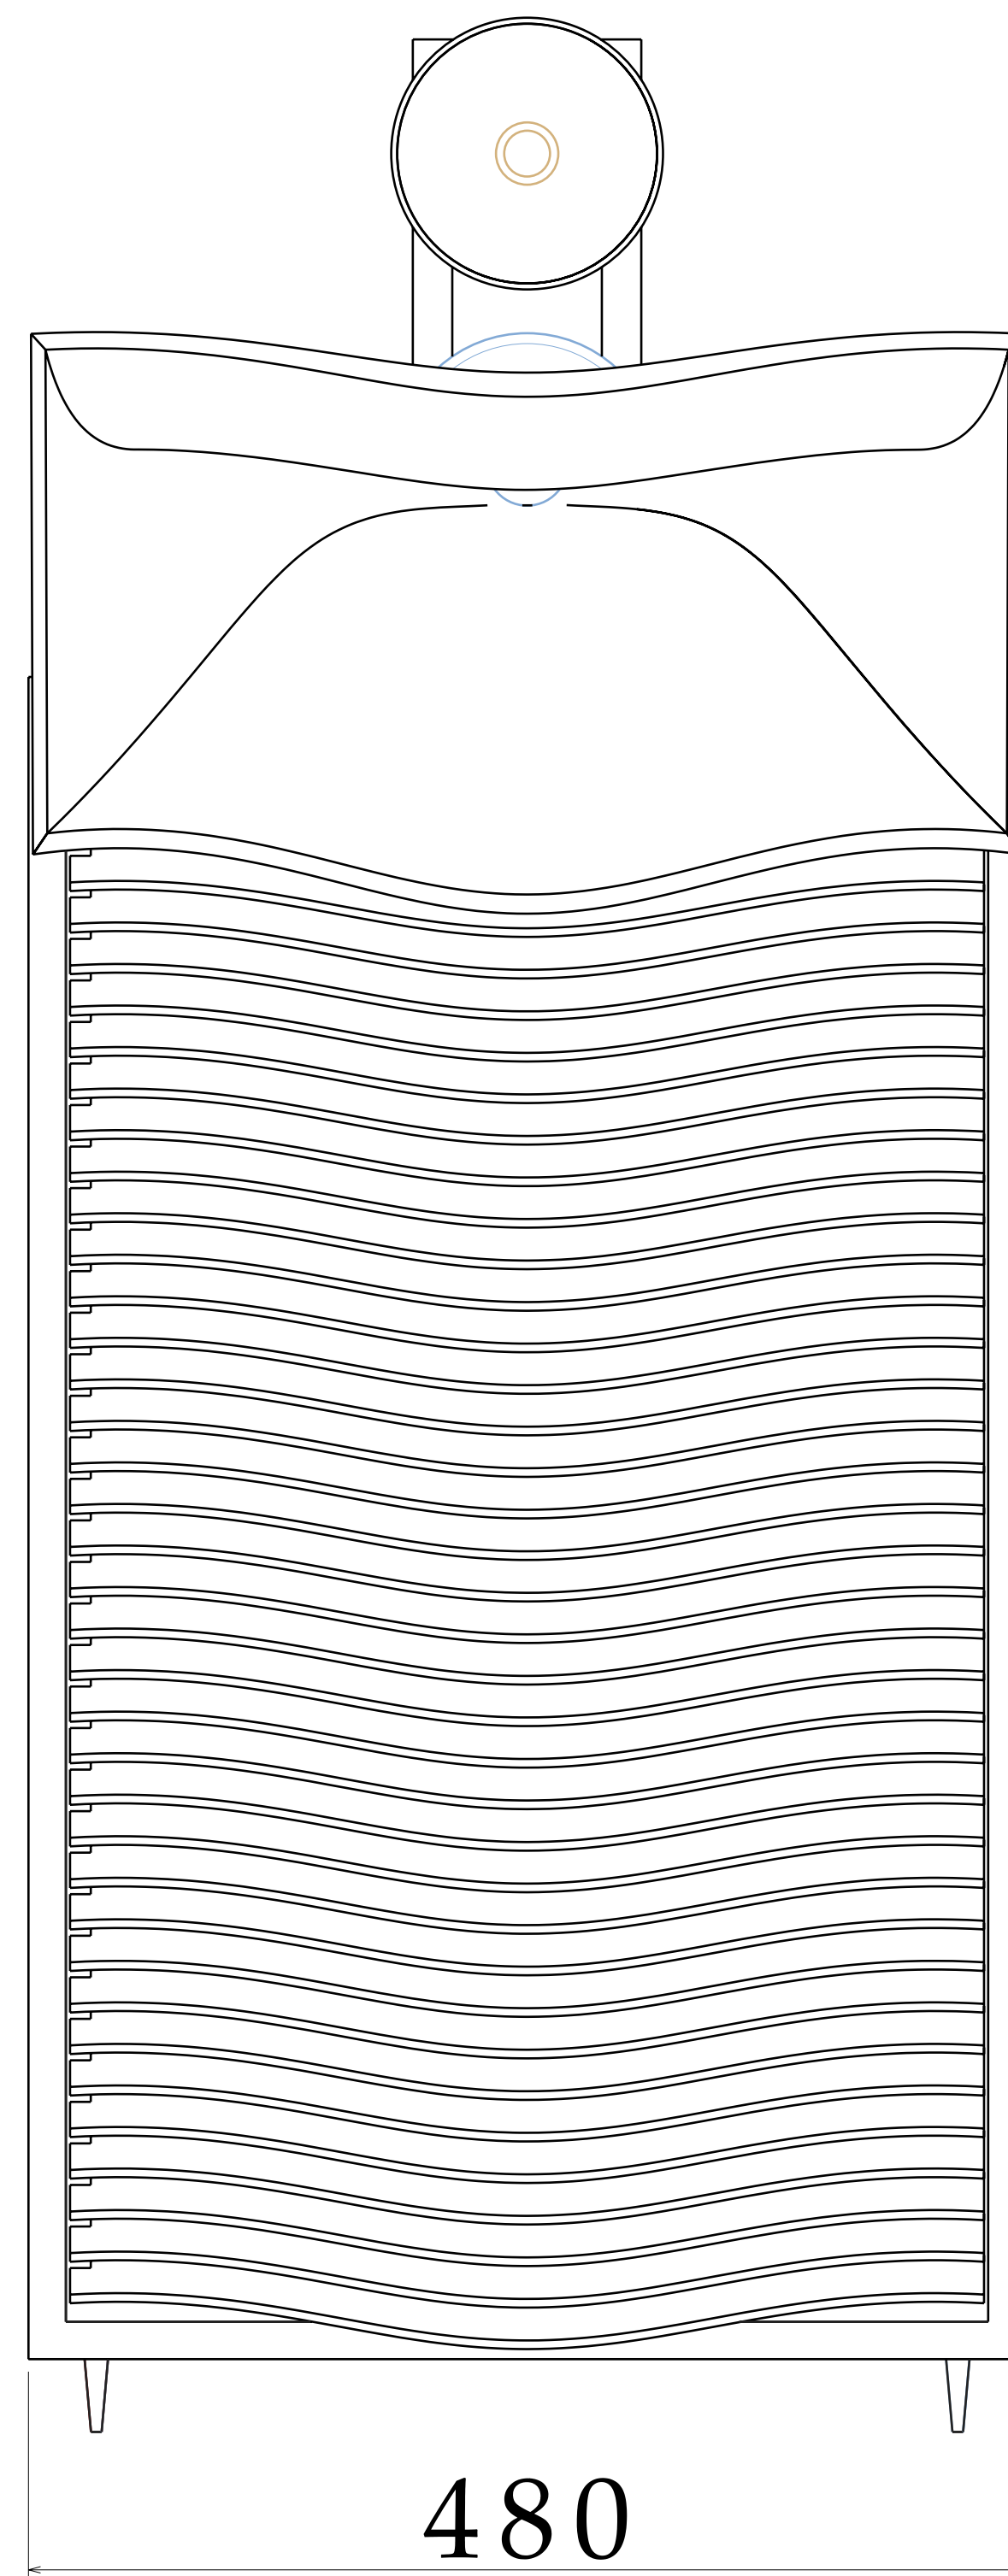
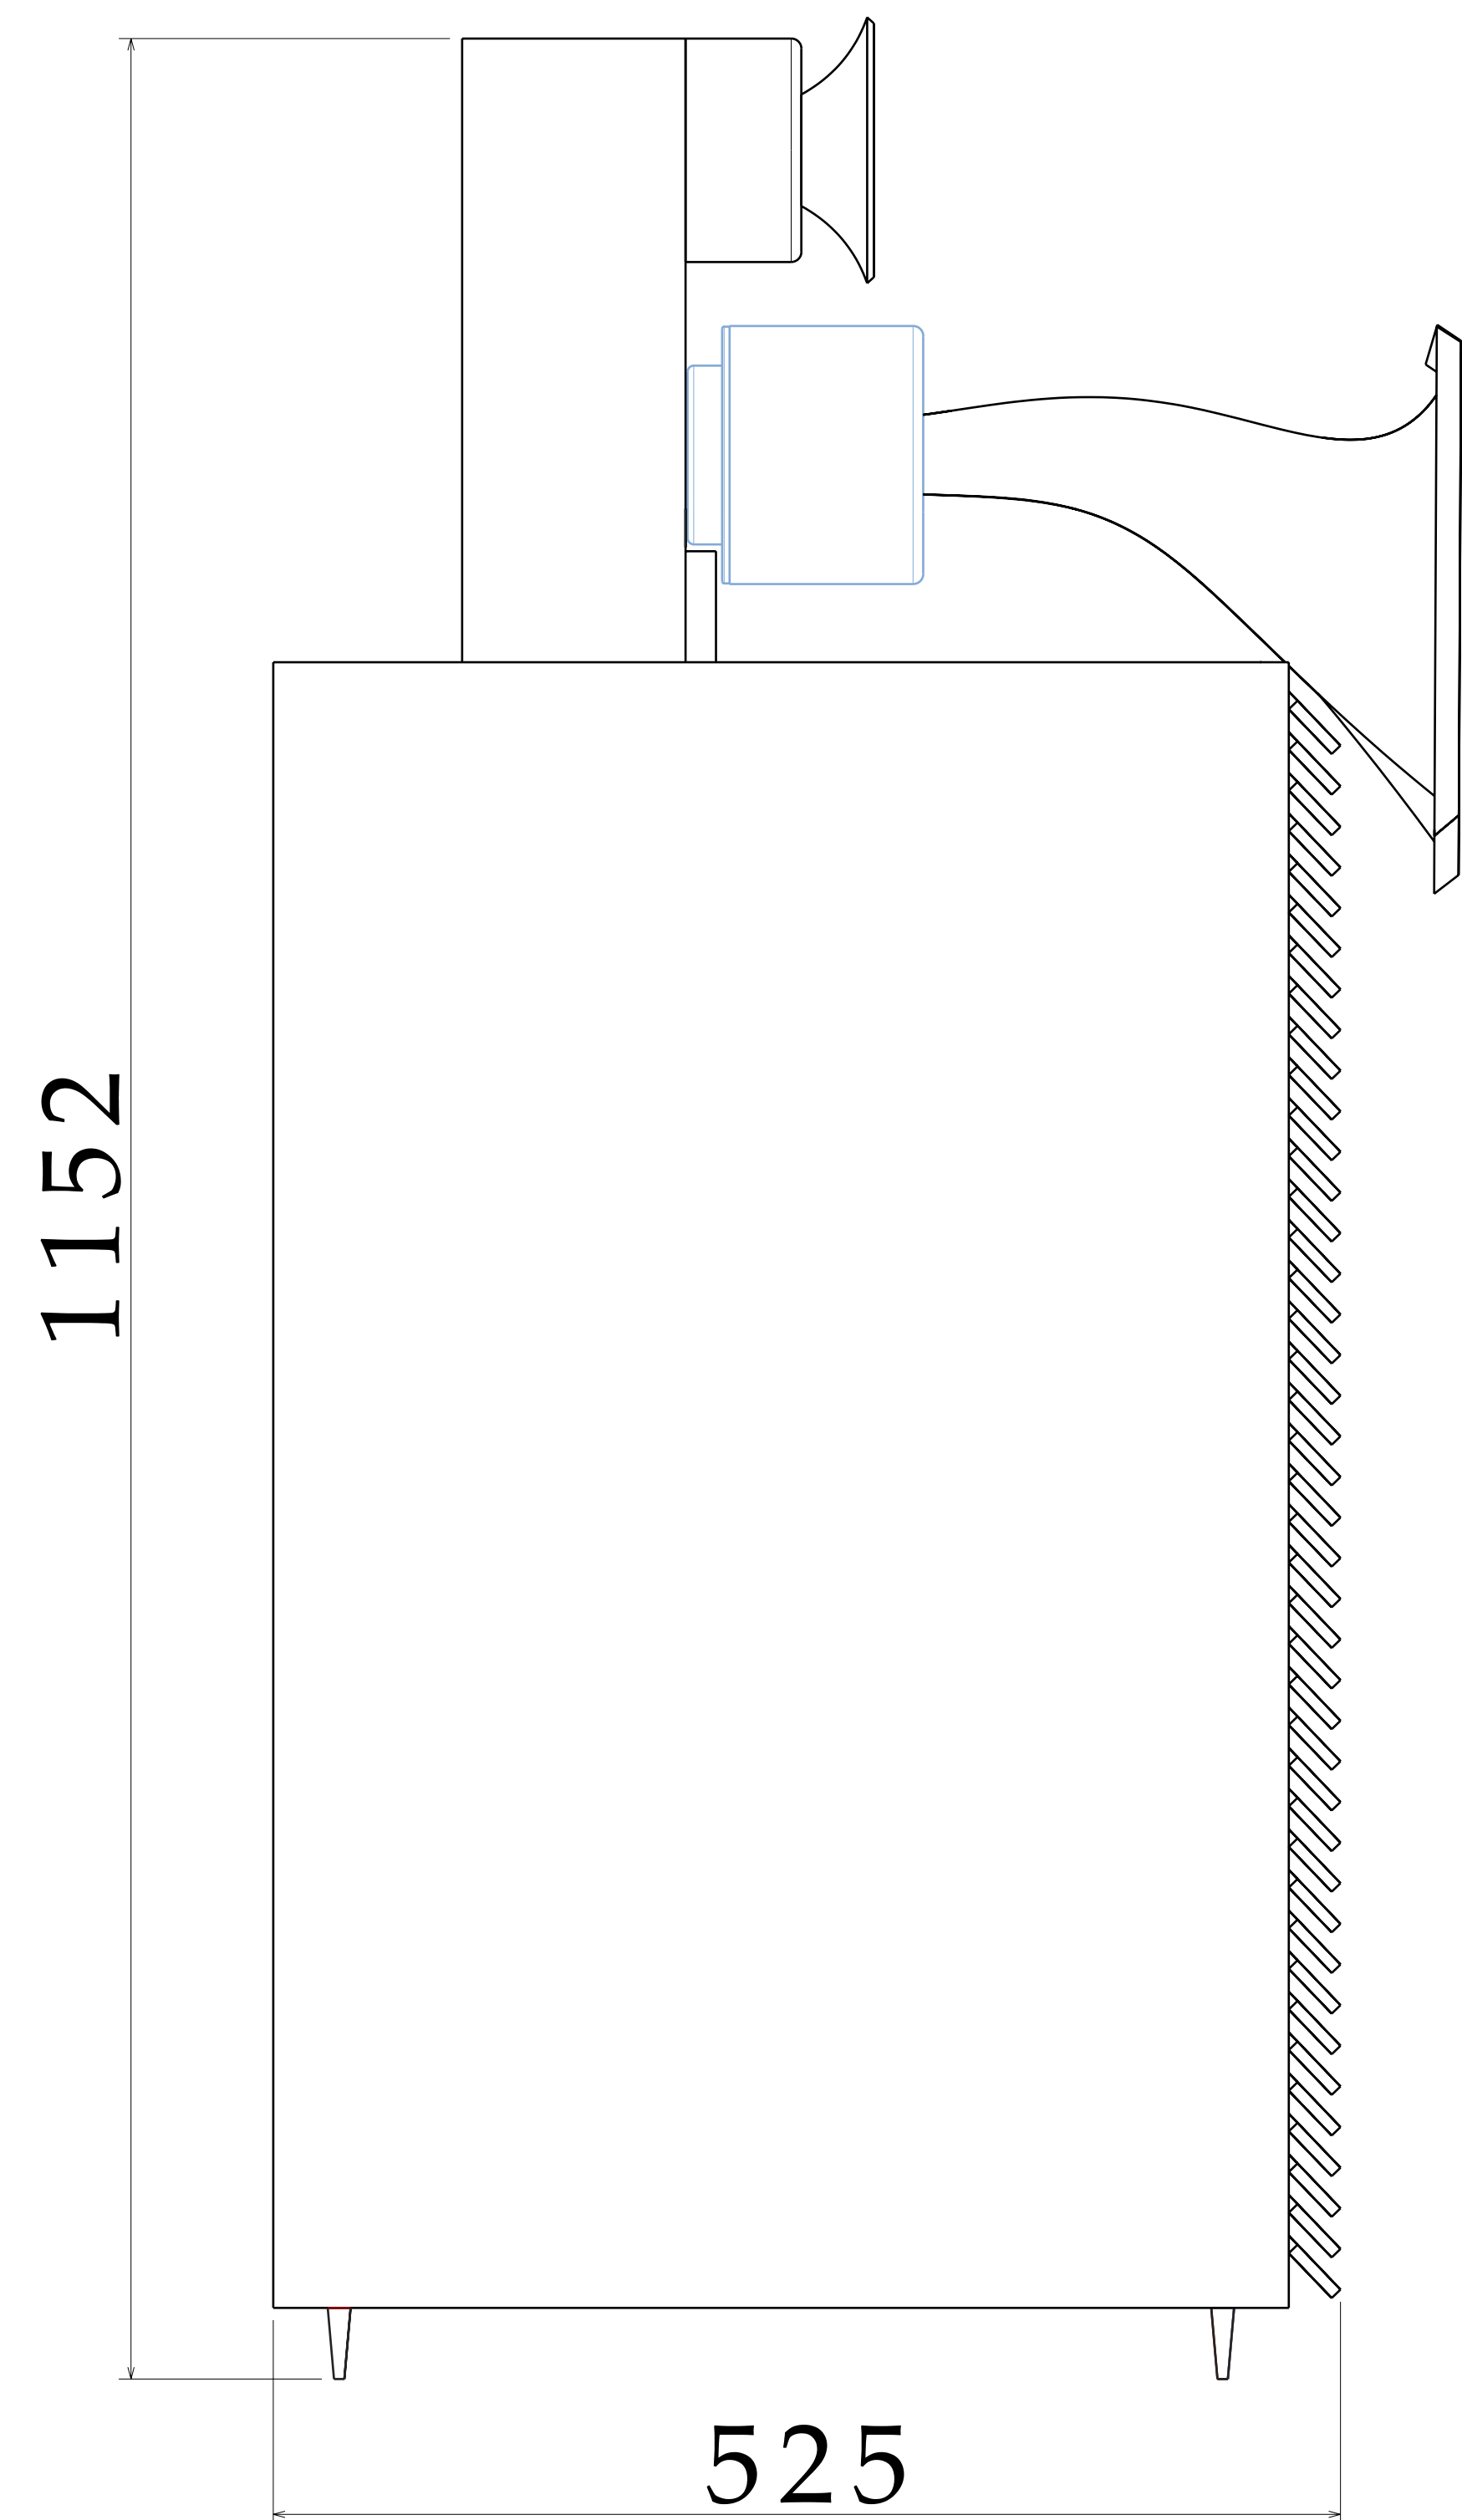


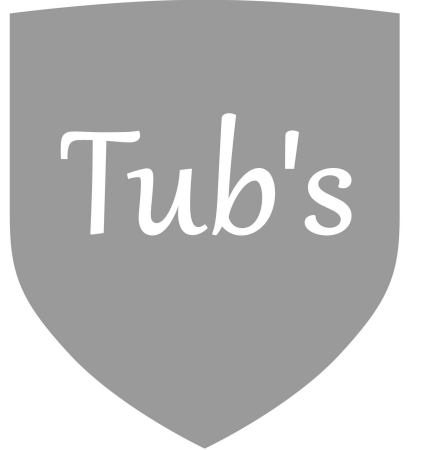

Frequilux

By Tub's Audio

Sensitivity ~ 98db

Configuration - 3way

HF - Horn loaded 25mm titanium dome, gold leaf damped.

MF - Vitavox [S2](#) made to order for Tub's Audio
* Horn Loaded via Tub's Audio Swoop Horn.

LF - TB15x, Extremely high quality 15" paper cone transducer
*Designed and manufactured in house.
*2.2 Tesla, 51mm Balanced VC, Copper clad pole piece
*Anti node pulp matrix damping structure
*Internal exponential reverse horn cabinet transient control
*Over engineered cermaic magnet
*Dynamic loading

Response ~ 33hz - 28,000hz 1/2 Space, goes lower in room.

Crossover - Tub's symetric cascade LF X MF & MF xHF

Power ~ 8 -100 quality watts, smooth simple 8 ohm Impedance

Weight ~ 70kg ea.

Shipping - 3 boxes. 2 @ ~100kg each 1@ `40kg